



SANME



VC7 系列 立式冲击破碎机


*VC7 Series Vertical Shaft
Impact Crusher*



上海山美环保装备股份有限公司
SHANGHAI SANME MINING MACHINERY CORP., LTD.
(中德合资控股)
(Sino-German JV Holding)

VC7 Series Vertical Shaft Impact Crusher

VC7系列立式冲击破碎机

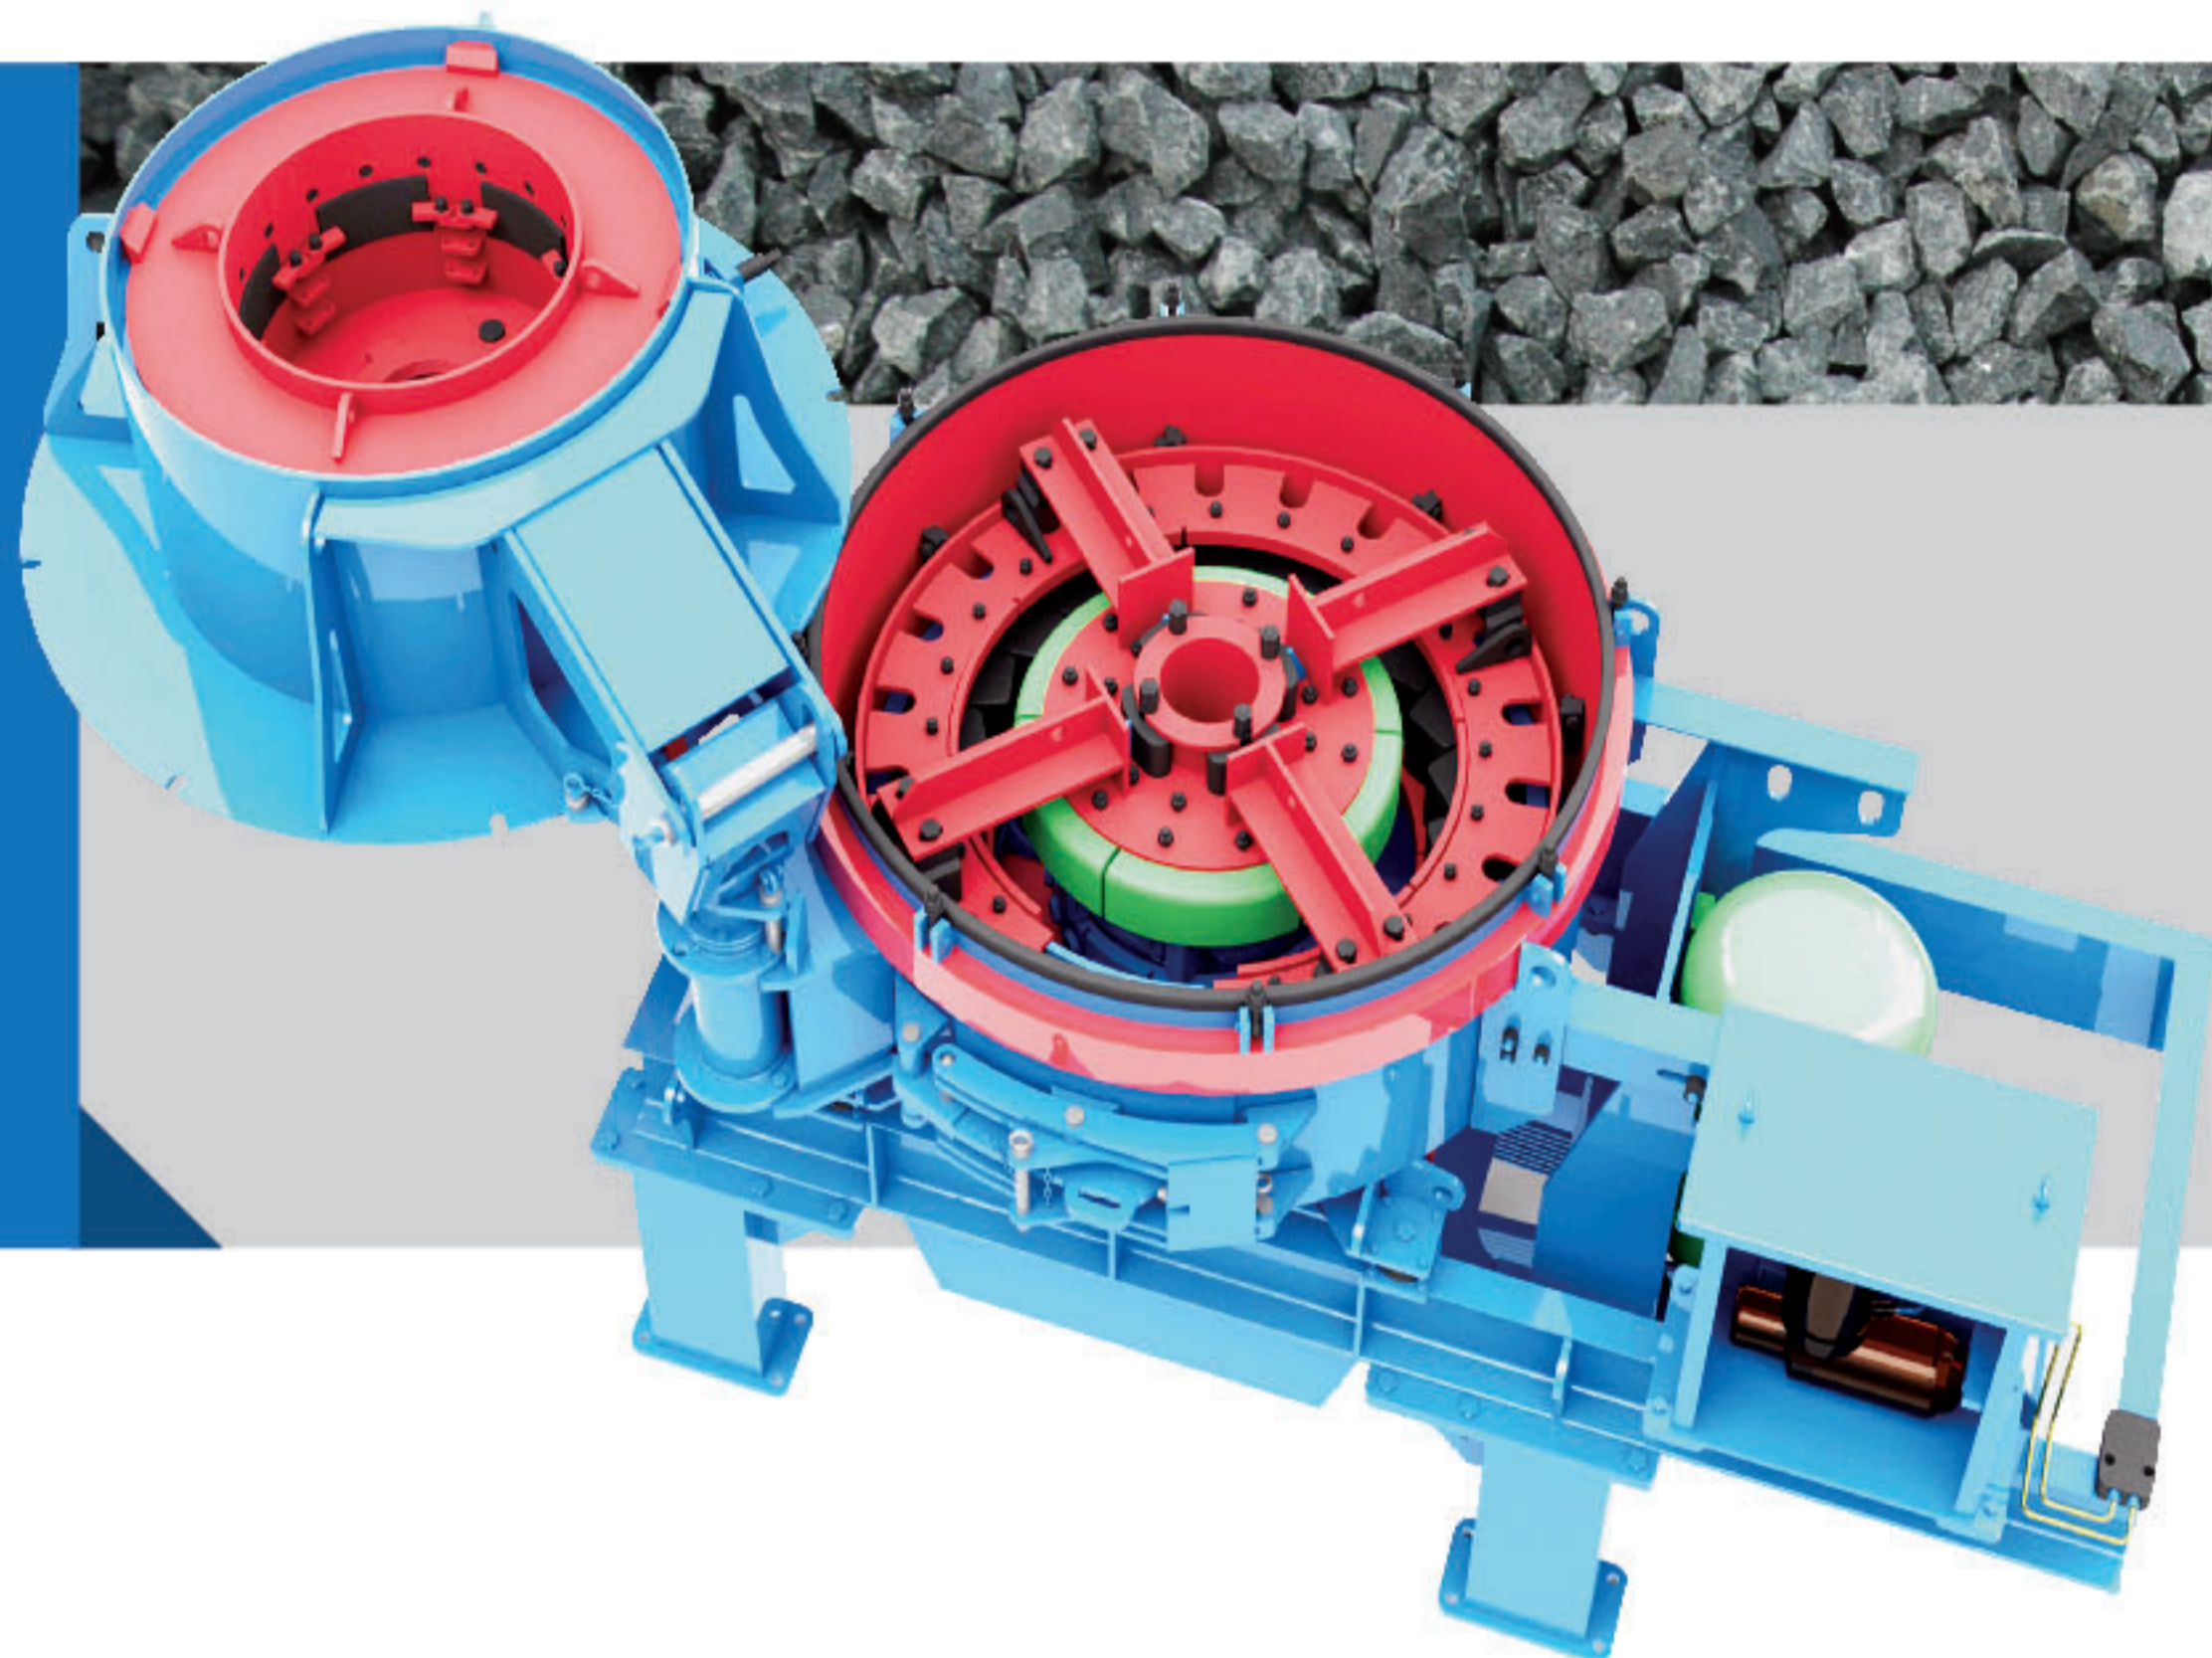



VC7 Series Vertical shaft Impact Crusher, which are high-functioned equipment for making sand and shaping, are developed and produced by SANME. Thin oil lubrication excels traditional lubrication in many aspects: larger rotation rate, patent sealing structure, and high sand production ratio.

VC7系列立式冲击破碎机是山美股份研制并生产的高性能制砂设备。


VC7系列立式冲击破碎机采用稀油润滑，与传统润滑相比，优点在于：转速更高、专利密封结构、免维护、制砂率高。

The chamber configuration


腔型配置

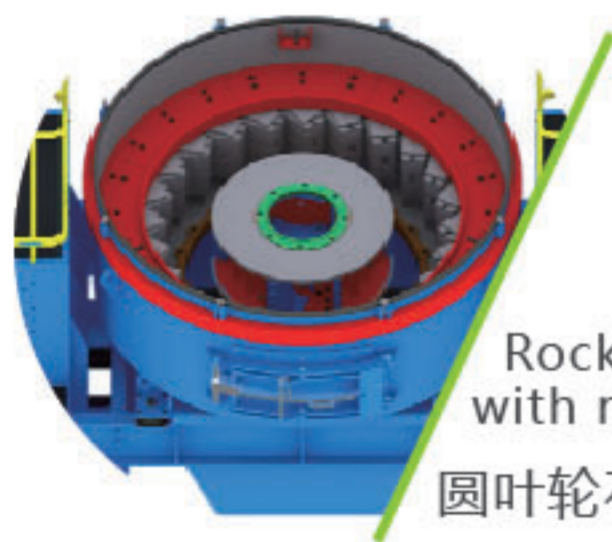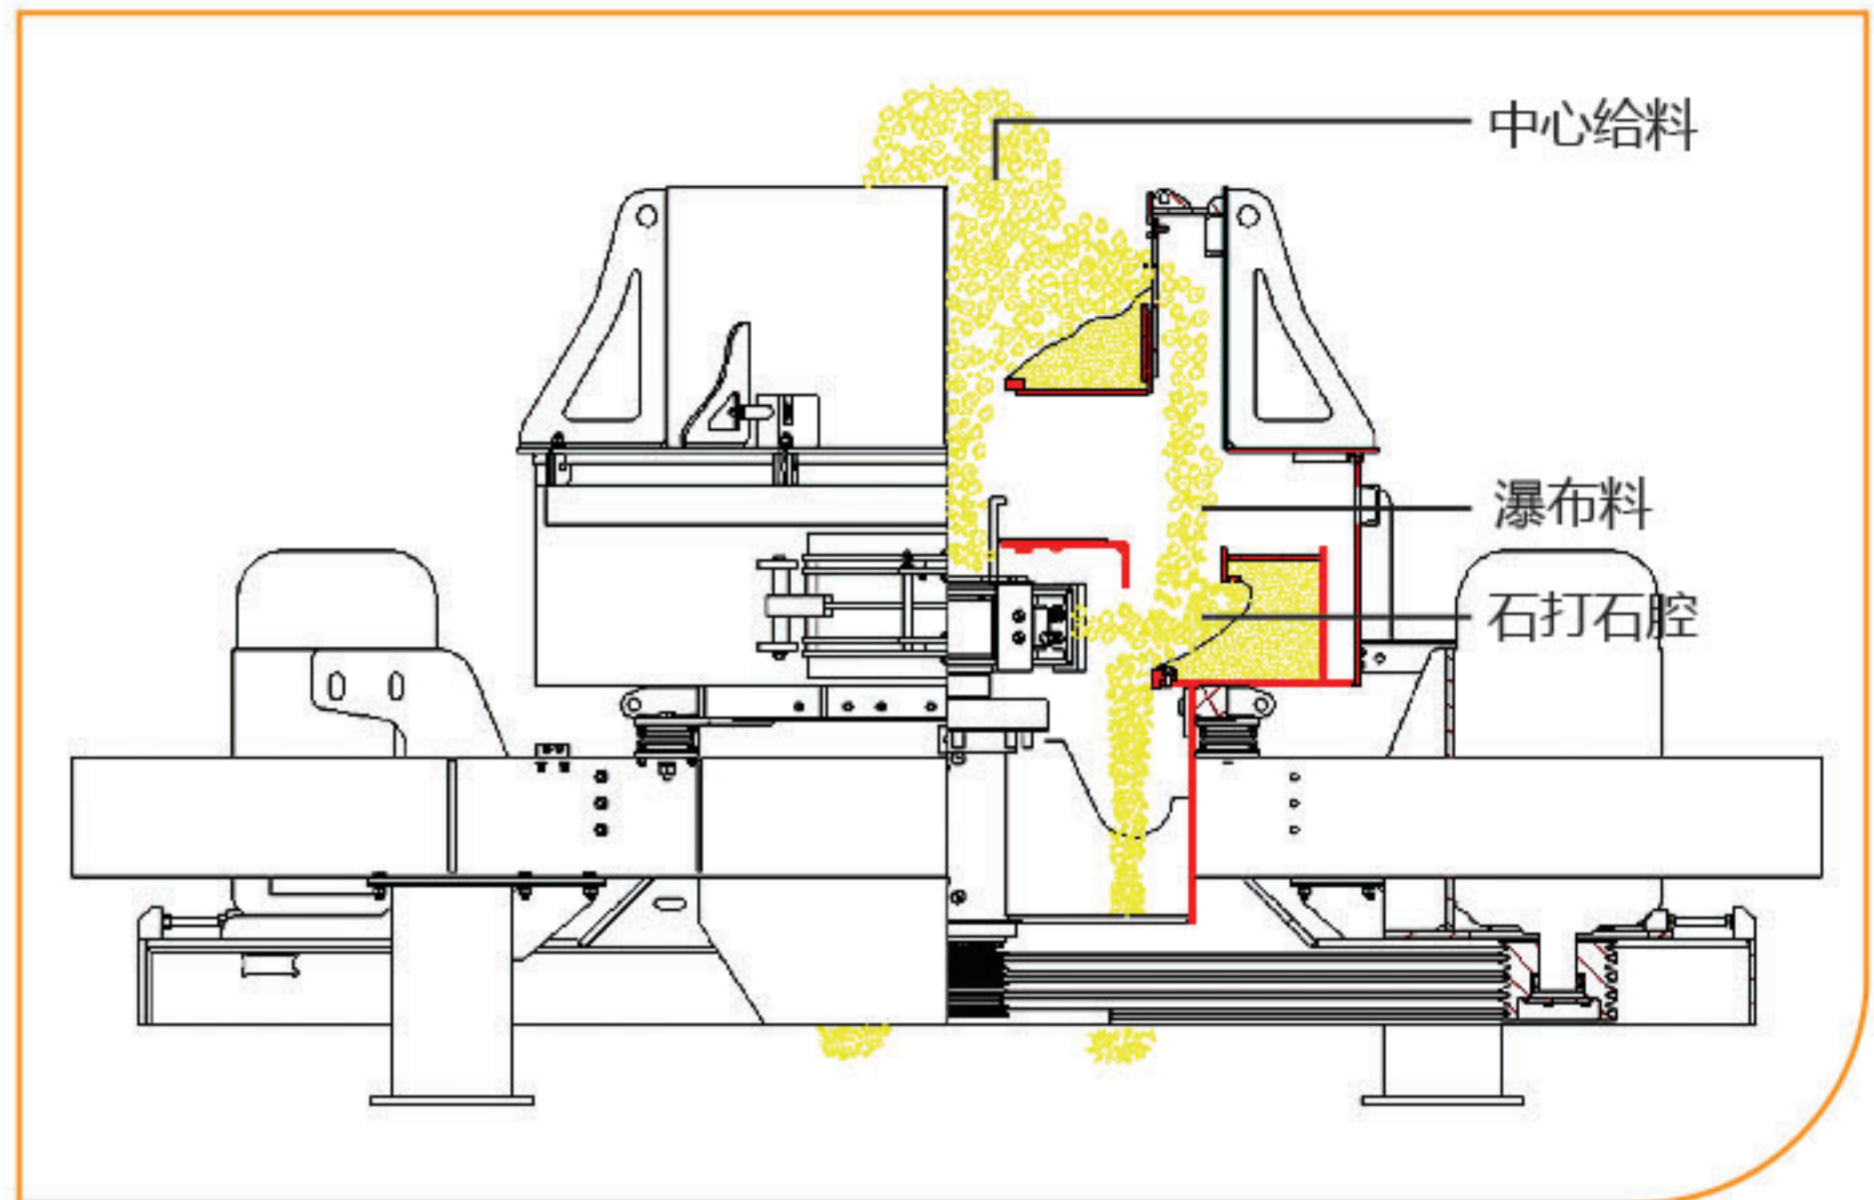

Rock on anvil
with round rotor
圆叶轮石打铁腔

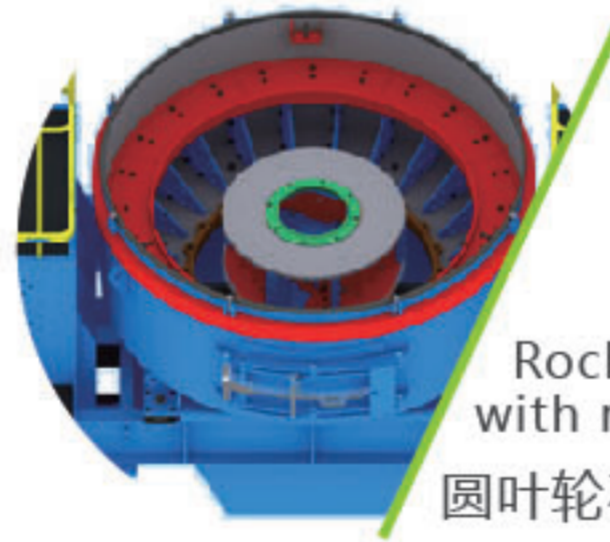

Rock on rock
with round rotor
圆叶轮石打石腔

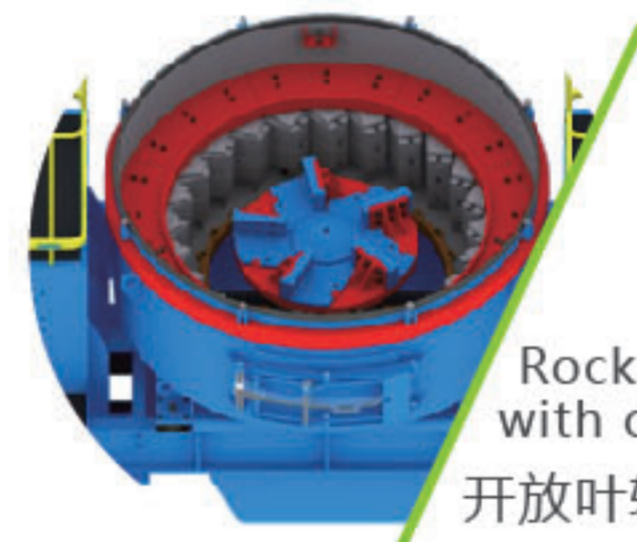

Rock on anvil
with open rotor
开放叶轮石打铁腔

Application range: medium and low abrasive materials
Features: enclosed rotor and square anvils combine the grinding action of the rotor with the high efficiency reduction of anvils.

适用范围：

中等及以下磨蚀性物料

使用特点：

闭式圆叶轮加方块反击板配置，具有转子研磨作用和反击板的高效破碎特性。

Application range: all rock types and the most abrasive materials
Features: enclosed rotor and rock box configuration causes rock on rock crushing which produces the best shaped material with the lowest wear cost.

适用范围：

所有物料，特别是高磨蚀性物料

使用特点：

闭式圆叶轮加石打石腔配置，具有石打石破碎，易损件成本低，且产品粒形优异。

Application range: large feed, mild to medium-abrasive materials
Features: open rotor and rock on anvil configuration offers high tonnage of production, high reduction ratios and large feed size with equal conditions.

适用范围：

较大粒度中等磨蚀性软物料

使用特点：

开放叶轮加石打铁腔配置，同等情况下产量更高、破碎比更大，进料粒度更大。

Features and Benefits

主要特点和优点

1 Patented rotor

Deep rotor offers higher throughput; and unique rotor tip enhances service rate of alloy and extends maintenance interval.

专利圆叶轮

深腔结构，允许更高通过量；特殊刀头结构，提高了合金使用率，延长维修周期。

2 Perfect interchange between ROR and ROA

Rock on rock configuration produces the best shaped and most consistent material with the lowest wear cost, which is suitable for all rock types, especially for most abrasive materials; rock on anvil configuration offers high reduction ratios and high efficiency of sand making, which is suitable for medium abrasive materials. Unique crushing chamber structure enables to achieve a rapid interchange between rock on rock configuration (ROR) and rock on anvil (ROA).

ROR 与 ROA 完美互换

石打石腔易损件成本低，出料粒形好且均匀，适用与所有类型石料，特别是高磨蚀性物料；石打铁腔，破碎比大，成砂率高，适用于中等磨蚀性物料。独特破碎腔体结构，能完美实现“石打石腔-ROR”与“石打铁腔-ROA”的快速互换。

3 Rotor with thin oil lubrication

Compare with the traditional rotor with greasing lubrication, the rotor being lubricated by thin oil provides a wide speed range, which can meet various requirements for crushing different materials; patented seal configuration enables free-maintenance without exchanging the wear parts such as oil seal, etc.

稀油润滑转子

相比传统脂润滑转子转速范围更大，能更好满足各种不同特性物料的破碎需求；专利密封结构，无需更换油封等易损件，真正免维护。

4 Easy disassembly platform design

Unique platform structure not only provides access to operators for observing the feed and maintaining the equipment, but also protects the motor against wind and rain without affecting road transportation.

快速可拆卸平台设计

独特的平台结构，不影响道路运输。既能方便观察进料、维护设备，又能很好保护电动机免受风吹雨淋。

5 High automation

Enhanced automation makes normal maintenance easy; multiple protection measures reduce the down time and extend service life.

高自动化程度

自动化程度更高，正常维护更加方便；多种保护措施降低故障停机时间，使用寿命更长。

6 Superior particle shape

Superior cubical shape products with low content of flat and elongated particles are a result of the high velocity impact crushing principle of VSI crusher, which is particularly suitable for aggregate shaping and manufactured sand making, for instance producing the aggregate for high way construction.

完美粒形

基于高速撞击破碎机理，产品粒形优异，呈立方体，且针片状含量低；因此，特别适用于骨料整形及人工制砂，比如高速公路用骨料的生产加工。

7 Hydracascade feed technology

Patented feed adjustment device provides an accurate control of ratio between central feeding and the cascade. Hydracascade feed technology not only improved energy availability and increased throughput, but also managed product shape and fines content via cascade feed.

瀑布给料技术

专利给料调节装置，能精确控制中心入料与瀑布料的比例。瀑布给料技术，既能提高能量利用率，增加产量，又能通过瀑布给料调节产品粒形及控制产品含粉量。

8 Super quality, high reliability

All series crushers are equipped with specified motors with the brand of Siemens JV, main bearing can be used by the products of domestic and international famous brands such as SKF, FAG, TWB and ZWZ, etc; key components such as lubrication station and wear parts are used by the products of domestic and international famous brands.

高品质，可靠性更高

全系标配西门子合资品牌专用电机；主轴承可选 SKF、FAG、TWB、ZWZ 等国内外知名品牌；润滑站、耐磨件等关键零部件均采用国内外知名品牌产品。

Technical Data

设备技术参数

VC7(H)系列立式冲击破碎机 (圆叶轮) VC7(H) Vertical Shaft Impact Crusher (round impeller)

型号 Model	叶轮转速 Speed of Rotor (r/min)	最大进料边长 Max Feed Size (mm)	通过量 (全中心入料/中心加瀑布入料) Throughput(t/h) (central feeding/central feeding + waterfalls feeding)		电机功率 Power(kw)	外形尺寸 Dimension(mm)	主机重量(不含电机) Weight(kg) (excluding motor)
VC726L	1881-2499	35	60-102	90-176	110	3600x1969x2200	≤7055
VC726M			70-126	108-211	132		
VC726H			96-150	124-255	160		
VC730L	1630-2166	40	109-153	145-260	2x90	4600x2150x2482	≤10000
VC730M			135-200	175-340	2x110		
VC730H			160-243	211-410	2x132		
VC733L	1455-1934	55	165-248	215-415	2x132	5500x2563x3178	≤14020
VC733M			192-286	285-532	2x160		
VC733H			238-350	325-585	2x200		
VC743L	1132-1504	60	230-346	309-577	2x200	5850x2740x3031	≤21040
VC743M			246-373	335-630	2x220		
VC743H			281-405	366-683	2x250		
VC766	1132-1504	60	330-493	437-813	2x280	5850x2740x3050	≤21840
VC766L			362-545	486-909	2x315		
VC766M			397-602	540-1016	2x355		
VC788L	517-597	65	460-692	618-1154	2x400	6000x3040x3456	≤23220
VC788M			560-848	761-1432	2x500		
VC799L	517-597	65	644-967	865-1615	2x560	6000x3122x3625	≤24980
VC799M			704-1068	960-1804	2x630		

VCU7(H)系列立式冲击破碎机 (开放式叶轮) VCU7(H) Vertical Shaft Impact Crusher (open impeller)

型号 Model	叶轮转速 Speed of Rotor (r/min)	最大进料边长 Max Feed Size (mm)	通过量 (全中心入料/中心加瀑布入料) Throughput(t/h) (central feeding/central feeding + waterfalls feeding)		电机功率 Power(kw)	外形尺寸 Dimension(mm)	主机重量(不含电机) Weight(kg) (excluding motor)
VCU726L	1881-2499	55	86-143	108-211	110	3600x1969x2200	≤6955
VCU726M			98-176	124-253	132		
VCU726H			132-210	143-300	160		
VCU730L	1630-2166	65	150-212	162-310	2x90	4600x2150x2482	≤9910
VCU730M			186-280	203-408	2x110		
VCU730H			220-340	245-480	2x132		
VCU733L	1455-1934	80	230-338	255-497	2x132	5500x2563x3178	≤13820
VCU733M			268-398	296-562	2x160		
VCU733H			327-485	373-696	2x200		
VCU743L	1132-1504	100	305-467	362-678	2x200	5850x2740x3031	≤21240
VCU743M			335-506	379-746	2x220		
VCU743H			375-540	439-800	2x250		

注：1. 上述通过量是在破碎物料密度为 1.6t/m³ 时开路循环生产中的总吨数。生产能力与破碎物料的物理性能、给料方式、进料粒度及其组成有关。
2. VC7H 系列为电动液压泵站，VC7 系列为手动液压泵站。
3. VCU7(H) 为开放式叶轮，用于低磨蚀性物料；VC7(H) 为圆叶轮，用于高磨蚀性物料。

Note: 1. Throughput is the total production tons at open circuit when the material bulk density to be crushed is 1.6t/m³. Production capacity will be varied by physical characteristics of material, feeding method, feeding size and material composition, etc.
2. VC7H series are equipped with electric hydraulic pump station while VC7 series are equipped with manual hydraulic pump station.
3. VCU7(H) with open impeller is suitable for crushing low abrasive materials while VCU7(H) with round impeller is suitable for crushing high abrasive materials.



上海山美环保装备股份有限公司
(中德合资控股)
(Sino-German JV Holding)



山美股份官方微信

版权所有 翻印必究 中国印制 Printed in China
SANME-27C | VC7 | 2022-01 | 1500

地址：上海市奉贤区青村镇奉村路 258 号
邮编：201414
电话：021-5759 1166 5759 1188
传真：021-5756 6188 5820 0089
网址：www.shsmzj.com
电邮：info@sanmecorp.com

Add: No.258, Fengcun Road, Qingcun County, Fengxian District,
Shanghai 201414, China
Tel: +86-21-5712 1166 5759 1188
Fax: +86-21-5756 6188 5820 0089
Website: www.sanmecrusher.com
E-mail: sales@sanmecorp.com

免费热线：400-921-5566
售后专线：021-5712 7766

Free Hotline: 400-921-5566
Service Center: +86-21-5712 7766

- ◎ 我们的产品在不断的更新和改进中，我们保留在未事先告知用户的情况下，更改参数及设计的权力。
Our products are constantly updated and improved, we reserve the right to change parameters and design without advance notification of customers.
- ◎ 照片中产品外观颜色与实际机型存在差异，颜色标准以实物为准。
If there are any discrepancy and difference between color of product appearance and actual machine type in the picture, color standard is subject to actual object.
- ◎ 本手册中的配置不一定是出厂标准配置，购买时请详细咨询我们。
Specifications and design in the brochures are not always the standard. Please consult us particularly when purchasing.